



KV DYNAMIC 2G 44.55.01

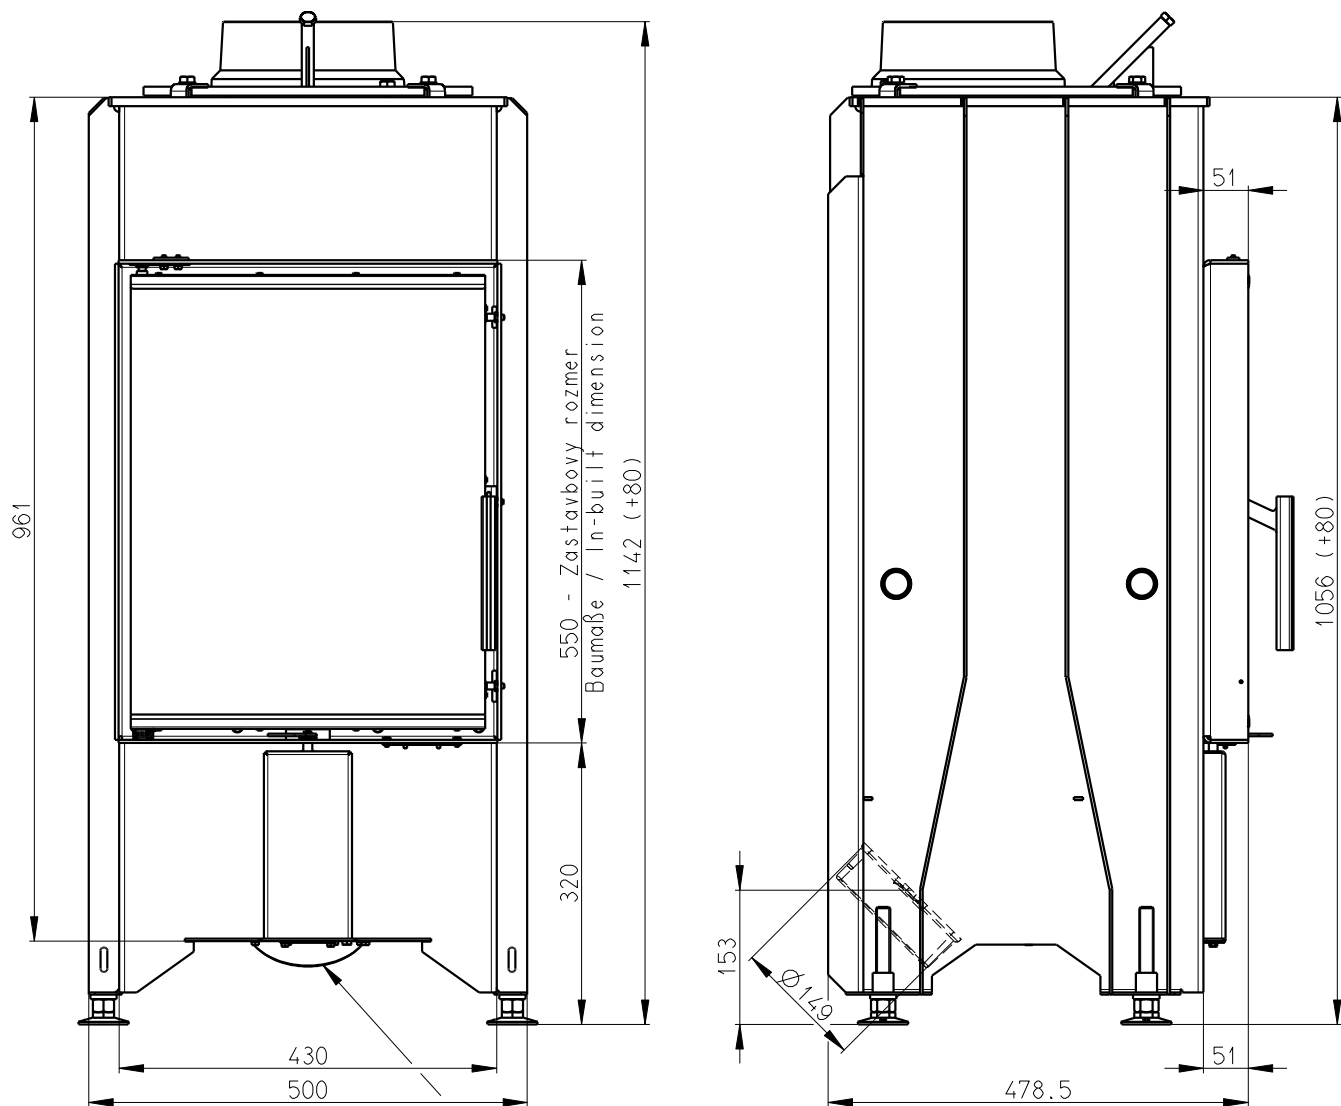


Centralni privod vzduchu
Central air inlet
Zentralluftzufuhr

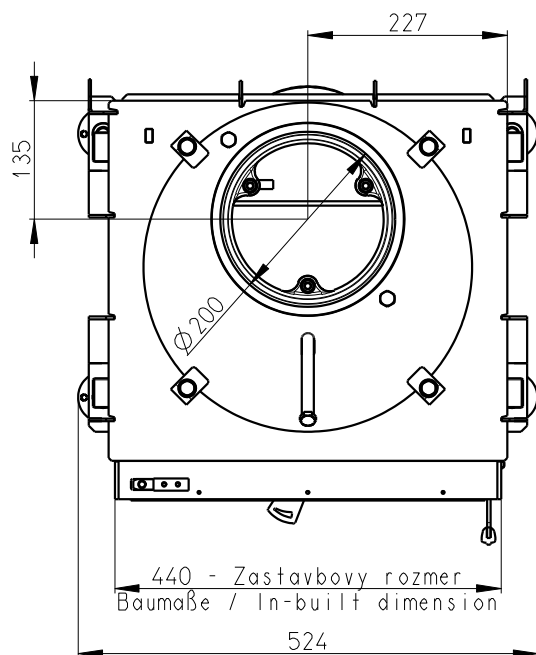

Litinový odvod kouře
Cast iron spigot
Der gusseiserne Rauchabgang

Vystup M10
Reservoir M10
Tauchhülse M10

Primarni a sekundarni vzduch
Primärluft und Sekundärluft
Primary and secondary air

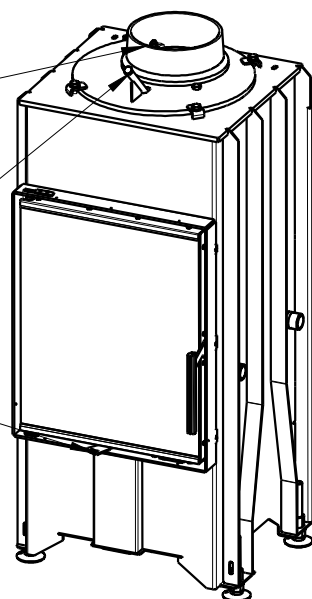

Artikl	D2L 01
--------	--------

General data

Nominal heat output	kW	7
Efficiency	%	85
Mass of the test fuel fired hourly	kg/h	2,16
Dry flue gases mass flow	g/s	4,8
Mean flue gas temperature	°C	241
Flue draught	Pa	12
Weight	kg	165
CO ₂	%	10,93

Recommended values

Reg.output	kW	5-10
Max. mass of the test fuel fired hourly	kg/h	3,5
Min. cross section of convect air inlet for nominal output	cm ²	880
Min. cross section of convect air outlet for nominal output	cm ²	1120
Combustion air requirement	m ³ /h	16,2
Flue gas connector diameter	mm	150 -200

Meets requirement limit values for

EN 13 229	•
BlmSch V 1	•
BlmSch V 2	•
DIN plus	•
15a B-VG	•

Supplied accessories

Holder with magnet	•
Hook to open the ashtray	•
Ashtray	•