



KV DYNAMIC 2G 66.50.13


Cast iron spigot
Der gusseiserne Rauchabgang

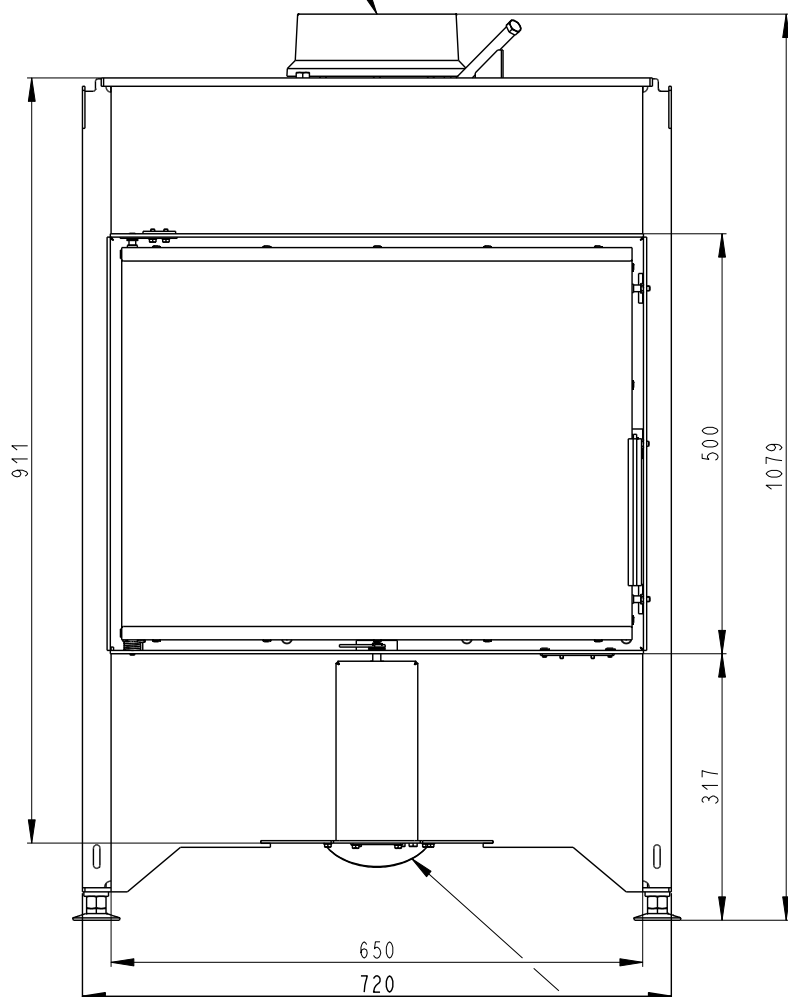


Reservoir M10
Tauchhülse M10

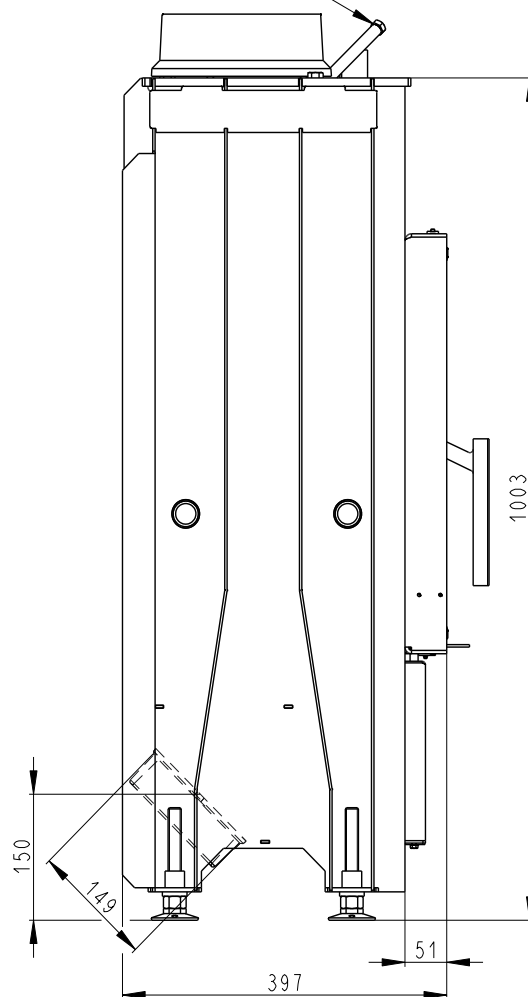

Central air inlet
Zentralluftzufuhr

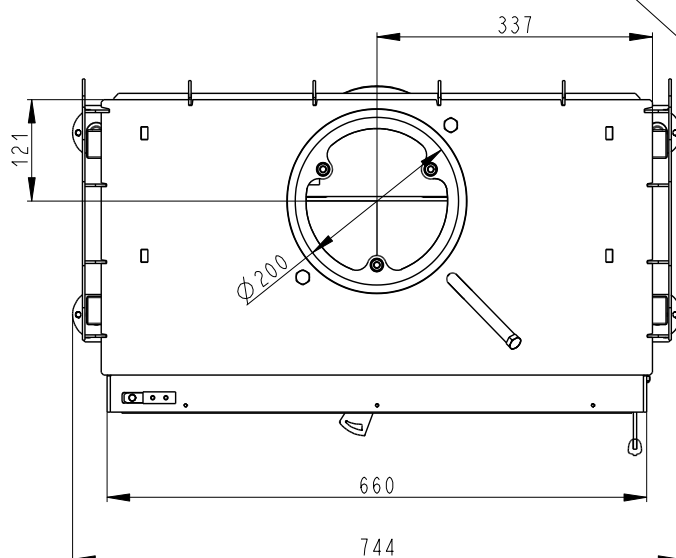

Primärluft und Sekundärluft
Primary and secondary air

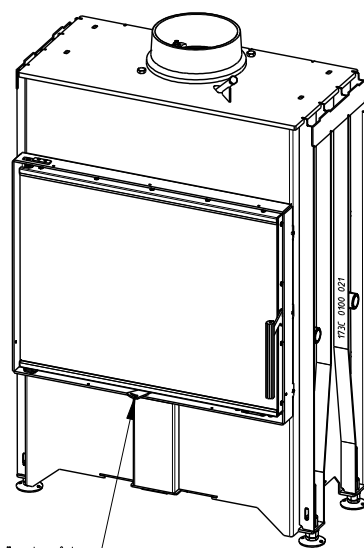

Artikl	D2M 13
--------	--------

General data

Nominal heat output	kW	4,8
Efficiency	%	84
Mass of the test fuel fired hourly	kg/h	1,33
Dry flue gases mass flow	g/s	4,1
Mean flue gas temperature	°C	207
Flue draught	Pa	12
Weight	kg	175
CO ₂	%	9,54

Recommended values

Reg.output	kW	2,5 – 7
Max. mass of the test fuel fired hourly	kg/h	3
Min. cross section of convect air inlet for nominal output	cm ²	880
Min. cross section of convect air outlet for nominal output	cm ²	1120
Combustion air requirement	m ³ /h	11,65
Flue gas connector diameter	mm	150 - 200

Meets requirement limit values for

EN 13 229	•
BlmSch V 1	•
BlmSch V 2	•
DIN plus	•
15a B-VG	•

Supplied accessories

Holder with magnet	•
Hook to open the ashtray	•
Ashtray	•