


KV DYNAMIC 2G 44.55.13

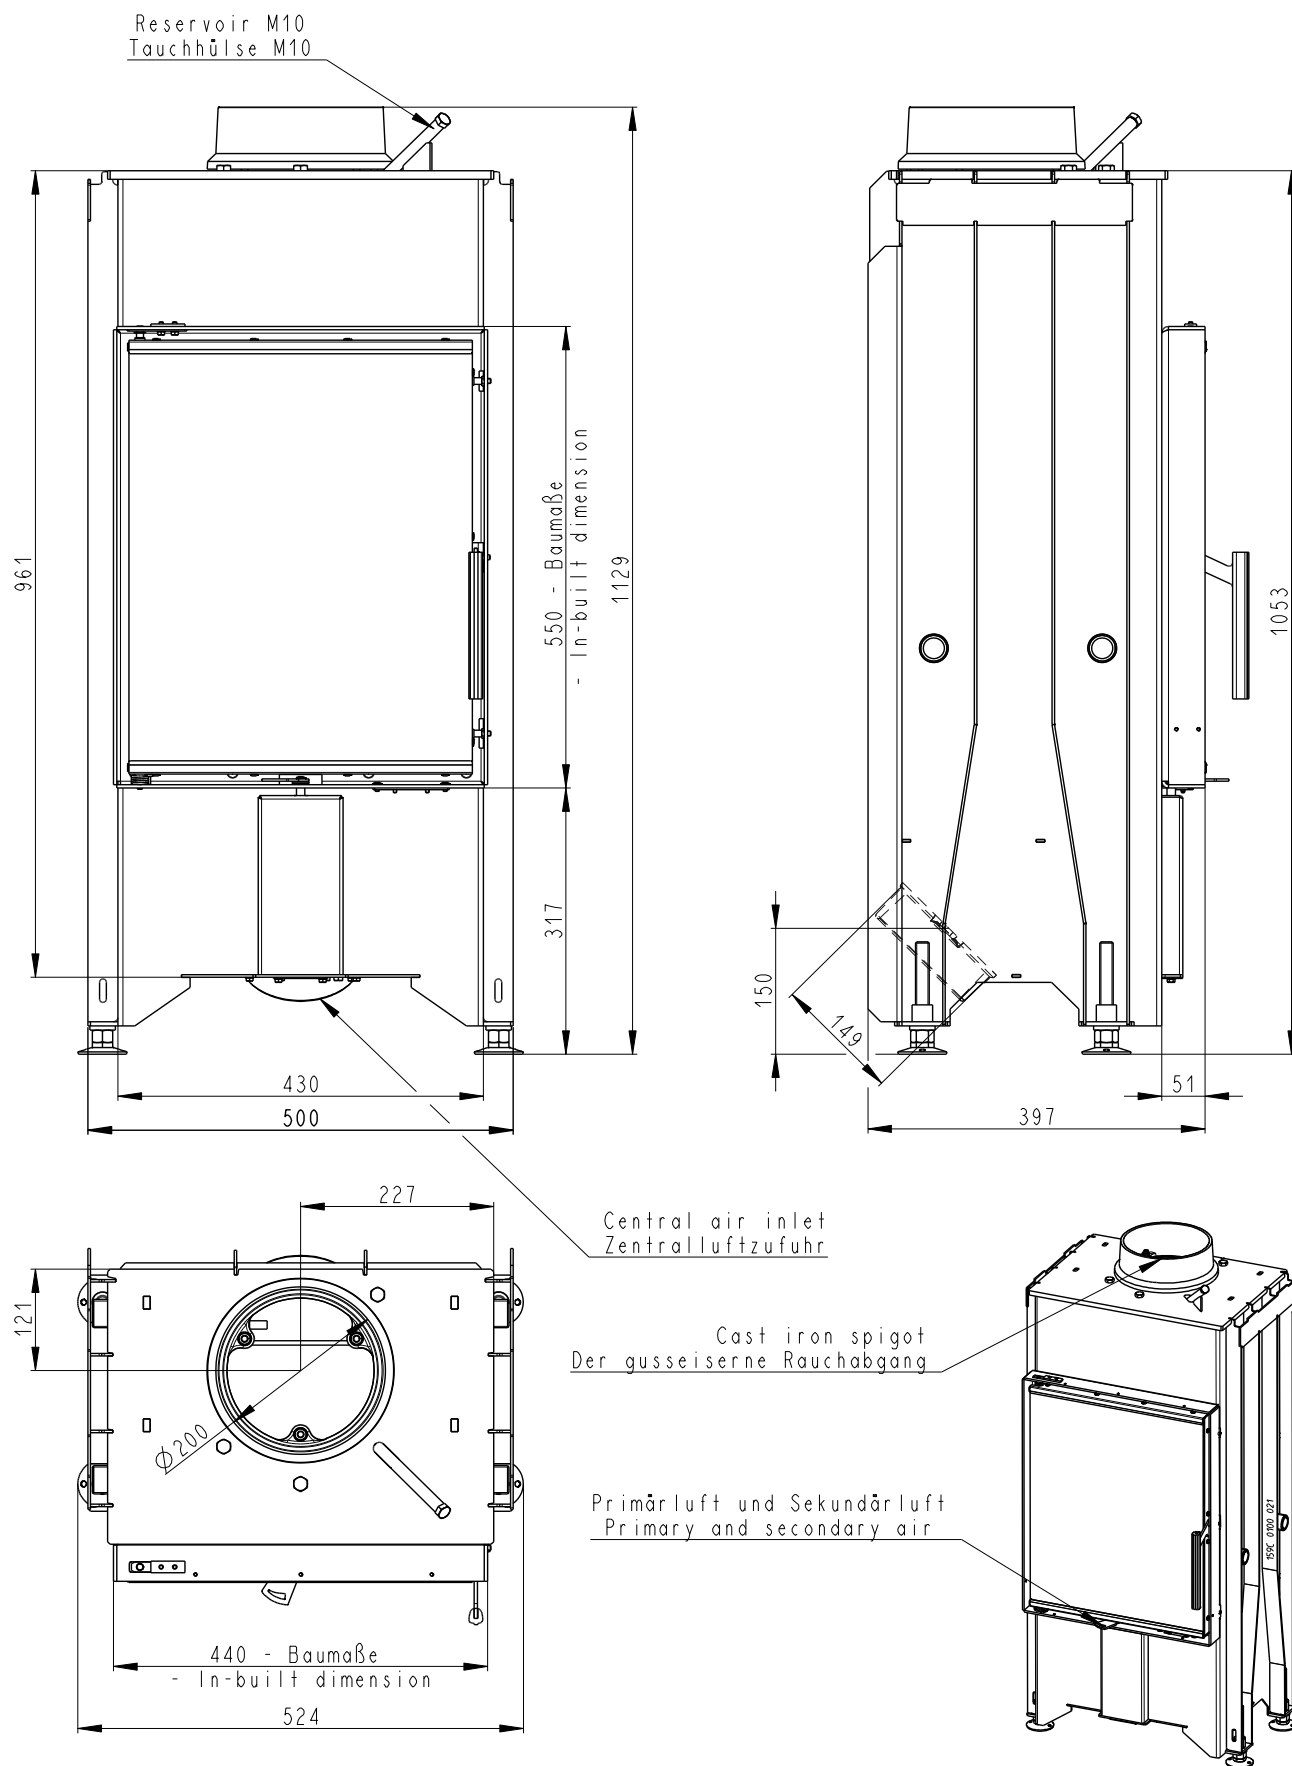

Artikl	D2L 13
--------	--------

General data

Nominal heat output	kW	4
Efficiency	%	83
Mass of the test fuel fired hourly	kg/h	1,11
Dry flue gases mass flow	g/s	2,8
Mean flue gas temperature	°C	229
Flue draught	Pa	12
Weight	kg	140
CO ₂	%	8,89

Recommended values

Reg.output	kW	3-8
Max. mass of the test fuel fired hourly	kg/h	2,5
Min. cross section of convect air inlet for nominal output	cm ²	880
Min. cross section of convect air outlet for nominal output	cm ²	1120
Combustion air requirement	m ³ /h	10,5
Flue gas connector diameter	mm	150 - 200

Meets requirement limit values for

EN 13 229	•
BlmSch V 1	•
BlmSch V 2	•
DIN plus	•
15a B-VG	•

Supplied accessories

Holder with magnet	•
Hook to open the ashtray	•
Ashtray	•