




ARONA

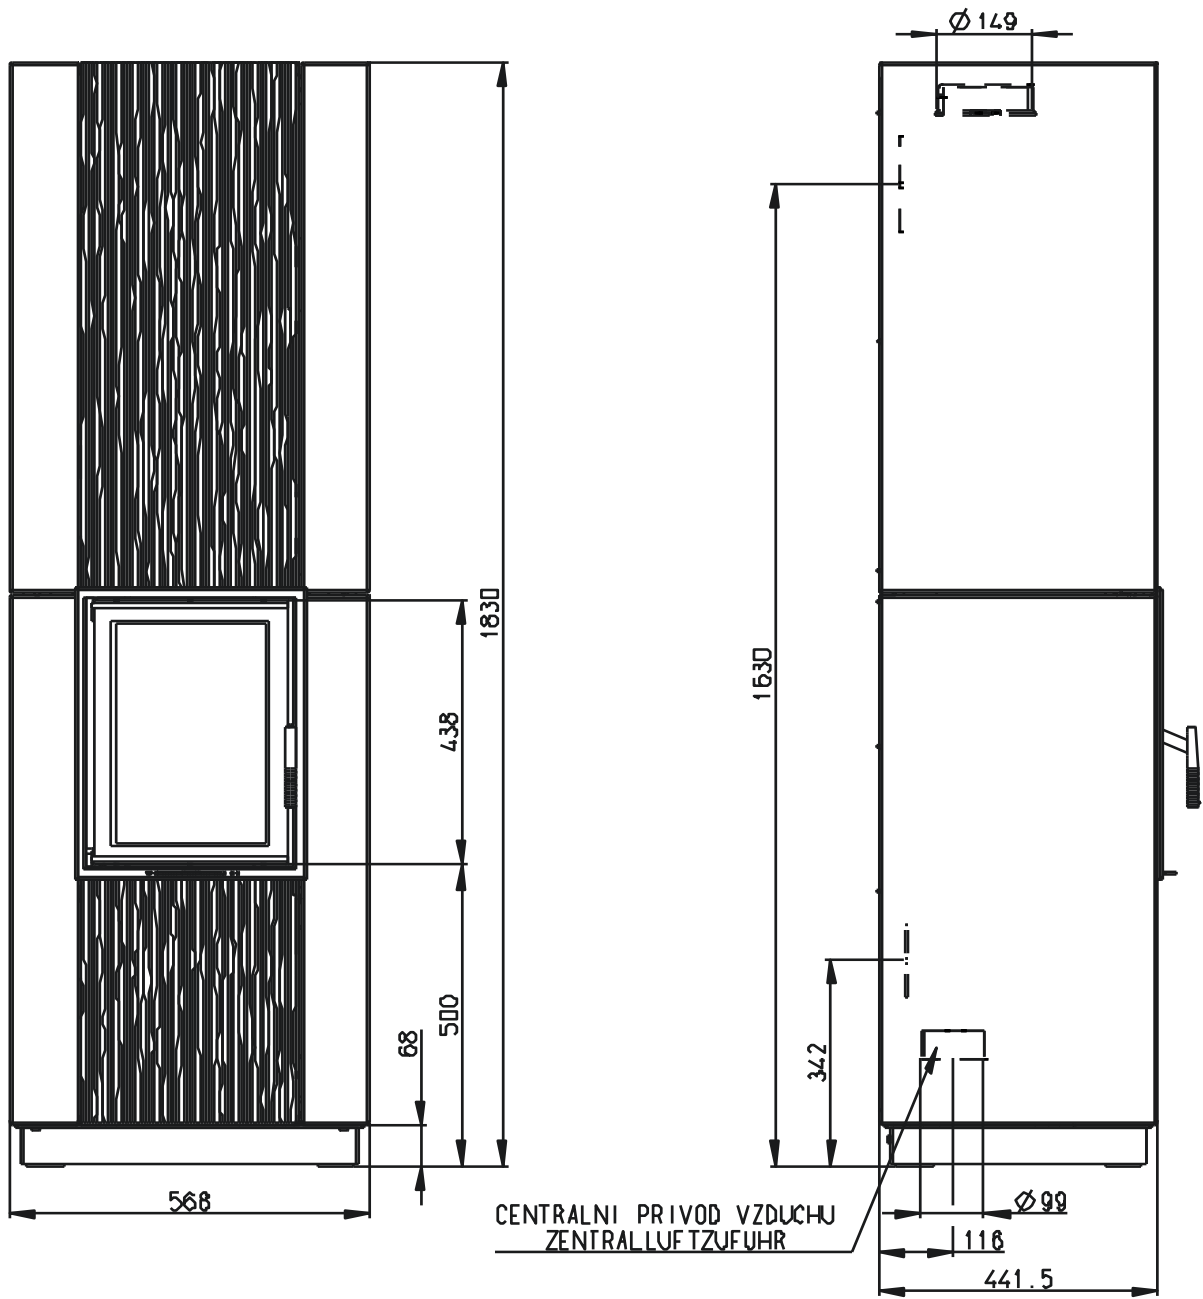

CENTRALNI PRIVOD VZDUCHU
ZENTRALLUFTZUFUHR

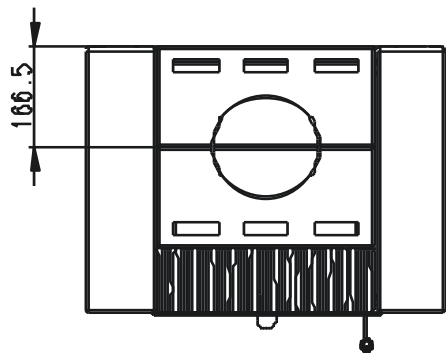

PRIMARNI A SEKUNDARNI VZDUCH
PRIMÄRLUFT UND SEKUNDÄRLUFT

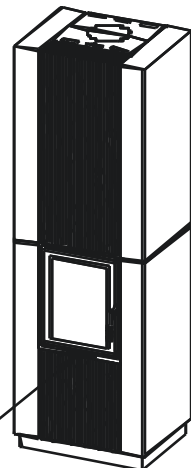

Artikl	ARONA
--------	-------

General data

Nominal heat output	kW	9,5
Efficiency	%	90,39
Mass of the test fuel fired hourly	kg/h	2,59
Dry flue gases mass flow	g/s	6,4
Mean flue gas temperature	°C	185
Flue draught	Pa	12
Weight	kg	450
CO ₂	%	11,64
Dust O ₂ =13%	mg/m ³	17
CO O ₂ =13%	mg/m ³	727

Recommended values

Reg.output	kW	4-12
Max. mass of the test fuel fired hourly	kg/h	3,3
Flue gas connector diameter	mm	150

Meets requirement limit values for

EN 13 240	•
BImSch V 1	•
BImSch V 2	•
DIN plus	•
15a B-VG	-

Supplied accessories

Holder with magnet	•
Ashtray	•